

Material

Profiled EPDM rubber
For use with standard lock rings

Sizes

80mm to 400mm diameter

Note

Made from EPDM rubber and used to complete a seal when using our Standard Lock Rings (Code SL). Only one seal is used per connection. The seal is placed over the bead on SpeedLock Duct prior to assembly. Hardness is 80° shore and tolerates temperatures from -40° to 100°.


Options

Also available in diameters 80-400 in Nitril Rubber (Code DESN). Hardness is 80° shore and operates from -15° to 80°. Nitril Rubber is resistant to oil, petrol and some acids.

Duct End Seals

Code *DES*

Code *DESN* (Nitril Rubber)

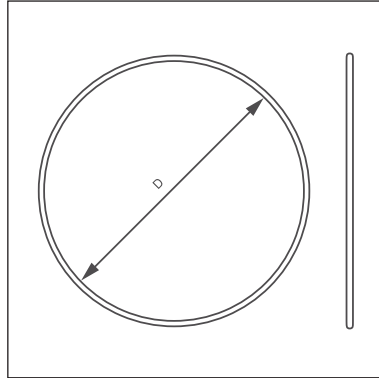

Dimensional specifications are given in the table below

Dimensional Specifications

PRODUCT CODE	D mm
FHS80	80
FHS100	100
FHS125	125
FHS150	150
FHS180	180
FHS200	200
FHS225	225
FHS250	250
FHS275	275
FHS300	300
FHS350	350
FHS400	400