




## SunFlex

UV resistant light weight and very flexible thermoplastic rubber ducting

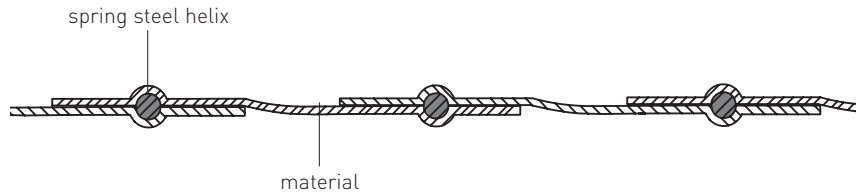

### Technical Data

Further diameters available upon request.  
Technical data are based on +20°C.

PRODUCT CODE	Weight kg/m	Bend Rad mm	Max work Pressure bar	Max Vacuum bar
SUNFLEX025	0.090	25	0.45	0.20
SUNFLEX032	0.140	30	0.40	0.20
SUNFLEX040	0.160	40	0.35	0.15
SUNFLEX052	0.210	50	0.35	0.10
SUNFLEX060	0.250	60	0.35	0.08
SUNFLEX063	0.250	63	0.35	0.08
SUNFLEX076	0.310	75	0.20	0.07
SUNFLEX082	0.330	80	0.20	0.06
SUNFLEX090	0.445	90	0.20	0.06
SUNFLEX102	0.560	100	0.15	0.05
SUNFLEX127	0.700	125	0.13	0.04
SUNFLEX140	0.730	140	0.12	0.04
SUNFLEX152	0.680	150	0.11	0.04
SUNFLEX180	0.820	180	0.09	0.03
SUNFLEX203	1.270	200	0.08	0.02
SUNFLEX254	1.600	250	0.07	0.02
SUNFLEX305	1.450	300	0.05	0.01
SUNFLEX356	1.550	350	0.04	0.01
SUNFLEX406	1.780	400	0.04	0.01
SUNFLEX457	2.000	450	0.03	0.01
SUNFLEX508	2.250	500	0.03	0.01

#### Material

Thermoplastic  
rubber-coated-polyester fabric

#### Wall Thickness

0.4mm

#### Colour

Black

#### Single Length

10m rolls / cut lengths to order

#### Temperature Resistance

- 40° up to + 150° C

#### Applications

Suction of chemical fumes and gases  
even under mechanical influence

#### Properties

- very good chemical resistance to fumes of acids and solvents
- UV and ozone resistant
- rot proofed
- withstands severe flexing