




ClearFlex® Heavy

Medium weight and flexible PVC ducting

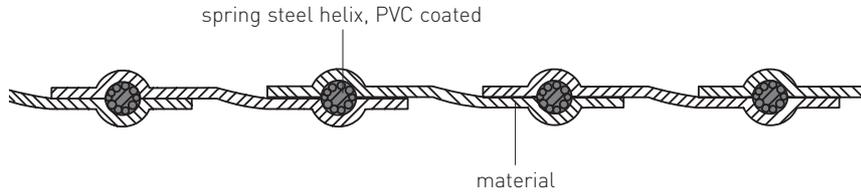

Material

Polyvinyl Chloride (PVC)

Wall Thickness

13mm-99mm =0.5mm

100mm-400mm=0.6mm

Colour

Clear

Single Length

10m rolls/cut lengths to order

Temperature Resistance

0°up to +70°C

Applications

Low pressure air, fume and dust handling and cable conduit

Properties

-High flexibility

-Smooth bore

Dia. (mm)	Weight kg/m	Bending Radius (mm)	max. Work.Press. (bar)	max. Vacuum (bar)
25	0,170	25	1,70	0,45
32	0,240	30	1,50	0,35
40	0,240	40	1,40	0,30
45	0,265	45	1,35	0,29
52	0,290	50	1,30	0,28
63	0,460	62	1,05	0,24
76	0,630	75	0,80	0,20
82	0,700	80	0,70	0,18
90	0,750	90	0,65	0,17
102	0,790	100	0,60	0,15
110	0,890	113	0,50	0,13
120	0,980	120	0,45	0,13
127	0,980	125	0,40	0,12
152	1,180	150	0,25	0,10
180	1,435	175	0,23	0,10
203	1,690	200	0,20	0,09
229	1,890	229	0,18	0,09
254	2,100	250	0,15	0,08
305	2,520	300	0,12	0,06
356	2,930	350	0,10	0,06

Further diameters available upon request.
Technical data are based on +20°C.