


## CncFlex™

Medium weight and very flexible polyurethane ducting

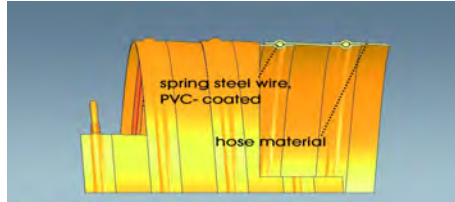

Dia. (mm)	Weight (kg/m)	Bend. radius (mm)	max. work. pressure	max. Vacuum (bar)
152	1,65	150	0,20	0,09
203	2,22	200	0,15	0,05
254	2,76	250	0,10	0,04

Further diameters available upon request.  
Technical data are based on +20°C.

### Material

Polyether-Polyurethane

### Wall Thickness

80mm-140mm = 0.65mm  
160mm-500mm = 0.80mm

### Colour

Clear

### Single Length

10m rolls/cut lengths to order

### Temperature Resistance

-40°up to +100°C

### Application

Suction of dust and particles in  
woodworking industries, especially  
used on CNC processing centres

### Properties

- Flame retardant according to DIN 4102 B1
- Resistant to hydrolysis and microbes
- Good abrasion resistance
- Excellent flexibility
- Resistant to oil and petrols
- Free of halogen and softeners
- Electrically conductive according to BGI 739-2 by grounding the wire