

**Material**

Profiled EPDM rubber  
For use with standard lock rings

**Sizes**


80mm to 300mm diameter

**Note**

Made from EPDM rubber and used to complete a seal when using our Standard Lock Rings (Code SL). Only one seal is used per connection. The seal is placed over the bead on SpeedLock Duct prior to assembly. Hardness is 80° shore and tolerates temperatures from -40° to 100°.

## Duct End Seals

Code *DES*

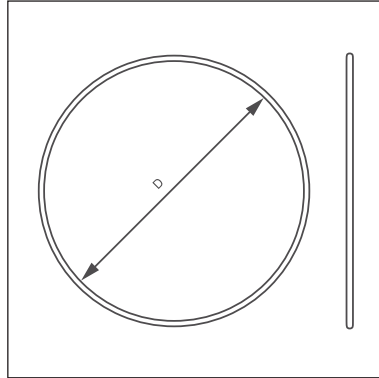

Dimensional specifications are given in the table below

### Dimensional Specifications

| PRODUCT CODE | D mm |
|--------------|------|
| DES080       | 80   |
| DES100       | 100  |
| DES120       | 120  |
| DES125       | 125  |
| DES140       | 140  |
| DES150       | 150  |
| DES160       | 160  |
| DES180       | 180  |
| DES200       | 200  |
| DES225       | 225  |
| DES250       | 250  |
| DES275       | 275  |
| DES300       | 300  |