


# SunFlexPro

Light weight and very flexible TPE ducting

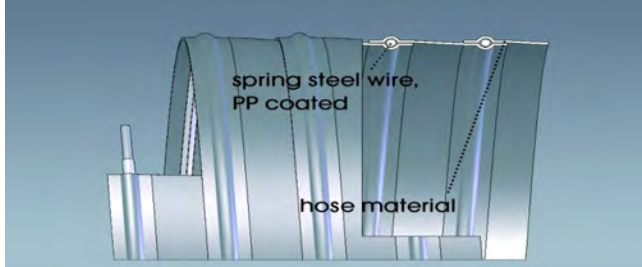

*\*New product - available in selected sizes*

Dia. (mm)	Weight kg/m	Wall-Thickness (mm)	Bending Radius (mm)	max. Work.Press. (bar)	max. Vacuum (bar)
51	0.22	0.50	35	0.32	0.17
63	0.30	0.40	42	0.26	0.16
102	0.59	0.60	70	0.17	0.12

**Material:**

TPE with blue abrasion protection profile

**Single Length:**

10m rolls/cut lengths to order

**Temperature Resistance:**

- 40° up to + 135° C (short-term 150° C)

**Applications:**

Suction of air, fumes and gases, ventilation, air-conditioning in vehicle construction.

**Properties:**

Good temperature resistance, free of halogens and softeners, good chemical resistance, excellent flexibility, good UV-resistance, protection of the hose itself and the vehicles in the automotive industry from scratches, due to the external abrasion protection profile

Technical data are based on + 23° C.