WeldFlex®

Light weight and very flexible PVC ducting



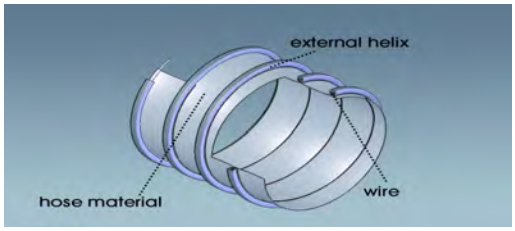

Internal Dia. (mm)	Weight (kg/m)	Wall-thickness (mm)	Bend. radius (mm)	max. work. pressure	max. Vacuum (bar)
52	0,40	0,2	30	0,85	0,32
63	0,50	0,2	36	0,68	0,22
76	0,60	0,2	45	0,47	0,14
82	0,63	0,2	48	0,43	0,12
102	0,65	0,2	60	0,30	0,08
127	0,80	0,2	75	0,21	0,05
152	0,90	0,2	90	0,16	0,04
160	0,94	0,2	96	0,14	0,03
180	1,05	0,2	108	0,12	0,02
203	1,21	0,2	120	0,10	0,02
254	1,70	0,2	175	0,07	0,01
305	2,13	0,2	210	0,05	0,01
356	2,30	0,2	245	0,04	0,01
406	2,90	0,2	280	0,03	0,01
508	3,90	0,2	400	0,02	0,01

Further diameters available upon request.
Technical data are based on +20°C.

Material
PVC-coated-polyester fabric

Wall Thickness
0.2mm

Colour
Grey

Single Length
10m rolls/cut lengths to order

Temperature Resistance
-30° up to +80°C Intermittent to 100°C

Applications
Air-conditioning, suction of air, welding fumes and light dusts

Properties
-Abrasion resistant outer helix
-Flame retardant according to DIN-4102
-Good compressibility

Sydney Sales +61 2 9677 2366 (1300 138 038)
www.eximo.com.au
email: sales@eximo.com.au